



W119 Single Console



Drawer Features & Display Benefits

- ▶ 1U 19" widescreen LCD console drawer
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ Green LED-backlit panel technology
- ▶ New enhanced aesthetics with molded front handle
- ▶ Short depth design of 460mm (18.1") only
- ▶ Front USB port for device access (USB Hub KVM only)
- ▶ 2 post rack mounting available

Options

- 3G / HD / SD-SDI Broadcast-grade input
- S-Video + Composite (BNC)
- HDMI or Audio input
- 48V, 24V or 12VDC power

Specifications

• LCD Panel

Manufacturer :	
Size (diagonal) :	19" widescreen TFT
Max resolution :	1440 x 900
Brightness (cd/m2) :	250
Backlight :	LED
Colors :	16.7M
Contrast ratio (typ) :	1000 : 1
Viewing angle (H/V) :	160° x 160°
Active area (mm) :	408 x 255
MTBF (hrs) :	30,000
Signal input :	VGA or DVI-D

• **Casing Color :** Black (RAL 9005)

• Weight (Single console)

Net :	11.5 kgs (25 lbs)
Gross :	16.3 kgs (36 lbs)

• Environmental

Operating :	0 to 50°C Degree
Storage :	-5 to 60°C Degree
Relative humidity :	5~90%, non-condensing
Shock :	10G acceleration (11 ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Regulatory

Safety :	cUL, FCC & CE certified
Environmental	RoHS2 & REACH compliant

• Power

Input :	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption :	Max. 48 Watt, Standby 5 Watt

• Dimensions (Single console)

Product :	441.6 x 460 x 44 mm / 17.4 x 18.1 x 1.73 inch
Packing :	590 x 768 x 140 mm / 23.2 x 30.2 x 5.5 inch

Console Cable

CX-6

- 6 feet DVI-D console cable (bundle)
- DVI-D + USB, server end
 - DVI-D + DB15 (USB KB & MS), console port



or

CB-6


- 6 feet VGA console cable (alternative)
- VGA + USB, server end
 - DB15 (VGA, USB KB & MS), console port

Keyboard

Ge G keyboard integrated with touchpad

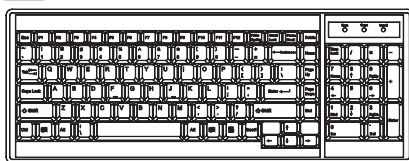

Gb G keyboard integrated with trackball

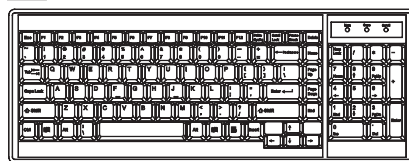

Supporting layouts

America		United States
EMEA		United Kingdom
		Germany
		France
		Spain
		Norway
		Italy
		Russia
		Switzerland
		Netherlands
		Portugal
Asia		China
		Japan
		Korea
		Arabia
		Turkey



- **Dimensions (with KVM)**
 Product : 441.6 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch
 Packing : 590 x 768 x 140 mm / 23.2 x 30.2 x 5.5 inch
- **Weight**
 Net / Gross : 12.5 kgs (28 lbs) / 18.4 kgs (40.5 lbs)
- **Casing Color** : Black (RAL 9005)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	W119 - MUIP1613	W119 - MUIP3213
	1	1	2	-	W119 - MUIP1624	W119 - MUIP3224
	1	1	0	-	W119 - MU1602	W119 - MU3202
	1	2	0	-	W119 - MU1603	W119 - MU3203
	1	3	0	-	W119 - MU1604	W119 - MU3204

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	W119 - UIP802	W119 - UIP1602	W119 - UIP3202
	1	1	0	W119 - U802	W119 - U1602	W119 - U3202
	1	0	0	W119 - U801	W119 - U1601	W119 - U3201

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	W119 - MIP813	W119 - MIP1613	-
	1	1	2	W119 - MIP824	W119 - MIP1624	-
	1	1	0	W119 - M802	W119 - M1602	-
	1	2	0	W119 - M803	W119 - M1603	-
	1	3	0	W119 - M804	W119 - M1604	-

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	W119 - IP802	W119 - IP1602	-
	1	1	0	W119 - 802	W119 - 1602	-
	1	0	0	W119 - S801	W119 - S1601	-

Combo DB-15 KVM Cable : CE-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	W119 - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-USBKVM-KIT.pdf

USB Hub DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	W119 - IP802H	W119 - IP1602H	-
	1	1	0	W119 - 802H	W119 - 1602H	-
	1	0	0	W119 - 801H	W119 - 1601H	-

USB KVM Cable : CB-6 / 10 / 15 (6, 10 or 15 ft)